

| | | |
|---------|----------|---------|
| PROJECT | QUANTITY | ITEM NO |
|---------|----------|---------|

Bun Warmer

BW 4 4 trays x 2 shelves




BW 4 bun warmer with 2 shelves, 4 trays across

Henny Penny Bun warmers help maintain higher bun quality and texture while improving the efficiency of sandwich production.

The BW 4 is a compact, low profile countertop cabinet designed to keep buns at optimal temperature and texture while offering efficient access across workflow.

Two shelves hold 4 trays each. Gentle convection heating is circulated through an air duct system to heat the entire cabinet evenly, so all buns achieve consistent quality.

Access is fast and easy with scratch resistant acrylic sliding glass doors.

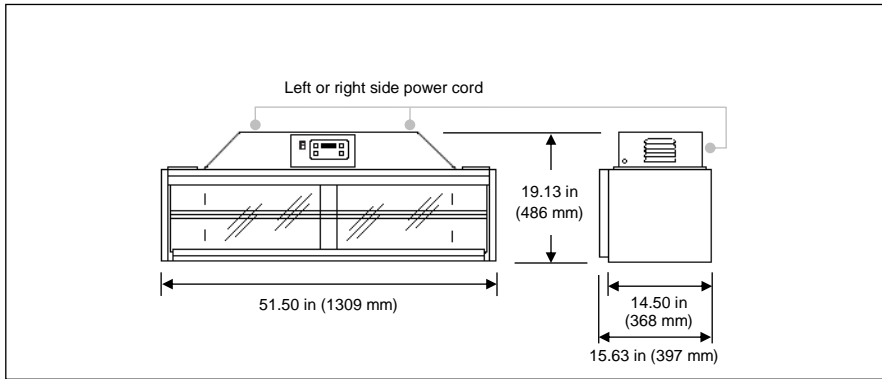

Standard Features

- Stainless steel construction for easy-cleaning and long life
- Electronic temperature control with program lock and digital clock
- 2 wire tray shelves accept standard bun trays, 4 per shelf
- Top mounted control housing saves counter space
- 2 scratch-resistant acrylic sliding doors
- Convection blower with enhanced air duct system warms interior evenly

Dimensions

| | | |
|--------|----------|------------------|
| Height | 19.13 in | (486 mm) |
| Width | 51.50 in | (1309 mm) |
| Depth | 14.50 in | (368 mm) at base |
| | 15.63 in | (397 mm) overall |

Heating

Electric convection
Thermostat 140°–200°F (60°–93°C)

Tray capacity

8 standard bun trays 10.50 x 14.00 in (267 x 356 mm) on 2 shelves, 4 per shelf

Crated

| | | |
|--------|--------------------|------------------------|
| Length | 55 in | (1400 mm) |
| Depth | 22 in | (550 mm) |
| Height | 27 in | (690 mm) |
| Volume | 19 ft ³ | (0.53 m ³) |
| Weight | 149 lb | (68 kg) |

Required clearances N/A

Please specify desired configuration Style

Pass-through Solid back

Power cord

Left side Right side

Bidding specifications

Provide Henny Penny BW 4 Bun Warmer for maintaining high quality buns and more efficient sandwich production.

Unit shall incorporate:

- 2 stainless steel wire shelves
- 2 sliding doors of scratch-resistant acrylic
- High-quality stainless steel construction
- Electric convection heating
- Electronic temperature controls

Electrical

| Volts | Phase | Hertz | kW | Amps | Wire* | Cord & Plug Not available for all destinations |
|-------|-------|-------|------|------|-------|---|
| 120 | 1 | 50/60 | 1.09 | 9.1 | 2+G | Please contact Henny Penny |
| 220 | 1 | 50/60 | 0.50 | 2.3 | 2+G | |
| 230 | 1 | 50 | 0.55 | 2.4 | 1NG | |

Laboratory certifications



*Units shipped without power cord and plug must have power cord and plug installed on site by a qualified electrician.

Continuing product improvement may subject specifications to change without notice.

| | | |
|-----------------------------------|--|-----------------------------------|
| <input type="checkbox"/> APPROVED | <input type="checkbox"/> APPROVED AS NOTED | <input type="checkbox"/> RESUBMIT |
| AUTHORIZED SIGNATURE | | DATE |

Henny Penny Corporation
PO Box 60 Eaton OH 45320 USA

+1 937 456.8400 800 417.8417
+1 937 456.8434 Fax 800 417.8434 Fax
+1 800 417.8405 Technical Support
www.hennypenny.com

HENNY PENNY
Engineered to Last