Simple and effective

Ventless Hood TDR Manual electric TDR Programmable electric

The features of the TDR Rotisserie Ventless Hood are as simple as they are effective.

The Fri-Jado ventless hood offers a low-cost venting solution; it gives you the flexibility to position a rotisserie anywhere in the store. No need for a central ventilation system.

The ventless hood has an advanced filtration process which removes virtually all smoke, grease particles and odors from the air stream and returns fresh air to ambient conditions; no disturbance of your store climate!

The ventless hood is a self-contained venting system and has a matching design with the single or double stacked Programmable and Manual electric rotisseries (5 + 7/8 models).



TDR Manual with ventless hood



TDR Programmable with ventless hood



Features Ventless Hood

Top features

- Eliminates need for central ventilation system
- Extracts smoke, fat and odors through a powerful filtration system
- Recirculates air through five charcoal filters
- Filters easily accessed from front of unit
- Flexibility position TDR anywhere in the store
- Noise level under 70 db
- Separate power connection

Standard characteristics

- Easy to clean
- Easy to install
- Matching design with TDR Programmable and Manual

Accessories

• Charcoal filter, set of 5





Stacked TDR's with ventless hood




making food irresistible


TDR 5 with Ventless Hood

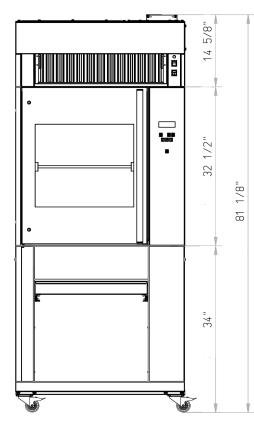



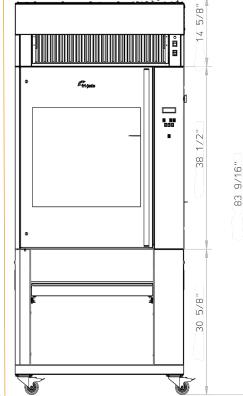

TDR 7/8 with Ventless Hood



Ventless Hood

- 1 Power cable
- 2 Exhaust pipe hood

Dimensions ventless hood type 5	
Width	33"
Depth	33 1/2"
Height	14 5/8″

Technical specifications ventless hood

type 5	
Net weight	159 lbs
Gross weight	198 lbs
Sound pressure	< 70 dB(A)
Voltage	208 V
Phase	1~
Frequency	50/60 Hz
Power	400W
Plug	NEMA 6-15P
Length of power cable	approx 75"

Dimensions ventless hood type 7/8

Width	39 1/8"
Depth	38 1/4"
Height	14 5/8″

Technical specifications ventless hood type 7/8

Net weight	170 lbs
Gross weight	214 lbs
Sound pressure	< 70 dB(A)
Voltage	208 V
Phase	1~
Frequency	50/60 Hz
Power	400W
Plug	NEMA 6-15P
Length of power cable	approx 75"

Specifications and technical data are subject to amendment without prior notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at www.frijado.com.



Fri-Jado Inc. 1401 Davey Road Suite 100 Woodridge IL 60517 Toll free 877-374-5236 Fax 630-689-1424 e-mail us.info@frijado.com www.frijado.com

