

Fast and energy saving

TDR 5 Programmable



The Turbo Deli Rotisserie is the fastest original rotisserie in the industry. The TDR's cavity is fed with air, cooking a rotisserie chicken as it is meant to be: crispy and delicious while maintaining an attractive appearance for hours.

The TDR pushes the air throughout the cavity, resulting in an improved heat transfer on the products and consequently in a reduced electricity consumption during the preparation process.

Thanks to eco-cooking the TDR saves 5% additional energy. Add to this the improved heat transfer on the products and a fast preparation process and you have yourself the most energy-efficient rotisserie with a high output.

The Cook Correction Technology corrects alterations in the cooking cycle that are due to half-loads, overloads, or products with a difference in temperature. It measures abnormalities in the temperature curve and corrects the cycle automatically, ensuring food-safety and energy-efficient cooking.

Features TDR 5 Programmable

Top features

- Controls with programmable settings
- 99 programs with up to 3 cook stages per program
- Efficient heat transfer reduces energy consumption
- Cook correction technology to control food safety
- Eco-cooking, saves on energy consumption

Standard characteristics

- 5 Meat fork, V-spit, basket or rack positions
- Rotor for up to 10 chicken (3.5 lbs) per batch
- USB connection for easy transfer of data and programs
- Boost functionality to add extra time
- Outstanding food quality: high-speed convection for even cooking
- Outstanding food quality: radiant heat for uniform browning
- Doors on both sides
- Door handle for pass through use - Avoid cross contamination
- Striking cooking theatre due to large glass surface and brilliant lighting
- Safety stop when opening the door
- Double glass doors, safe to touch
- No water and drain connections needed
- Matching stand on casters

Accessories (sold separately)

- Meat forks
- Multi-purpose baskets
- V-spits
- Chicken racks

Optional extras (sold separately)

- Flexible positioning with ventless hood
- Matching stand on castors
- Double stacked unit 5 P + 5 P



Programmable controls



Matching stand on castors (optional)






Ventless hood (optional)






Also available: Stacked TDR 5 P + 5 P

TDR 5

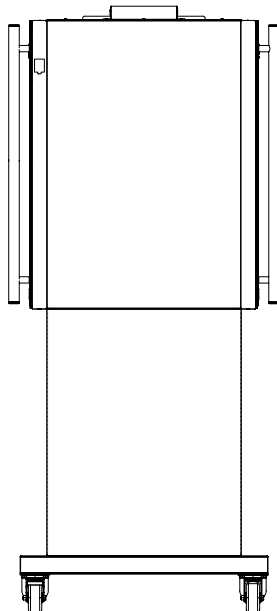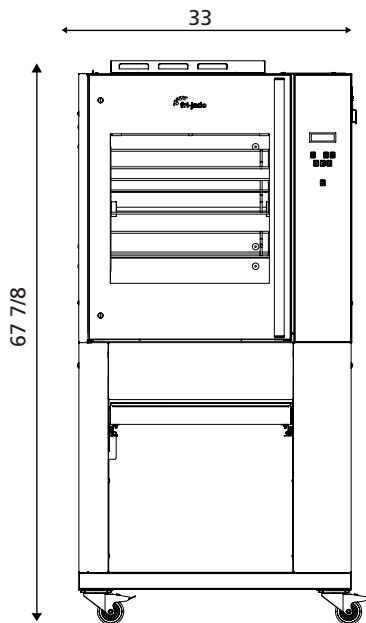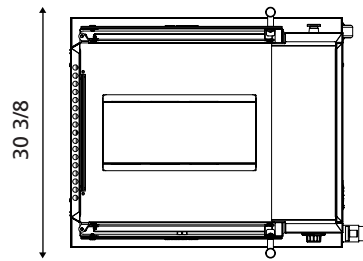

TDR 5 P + 5 P

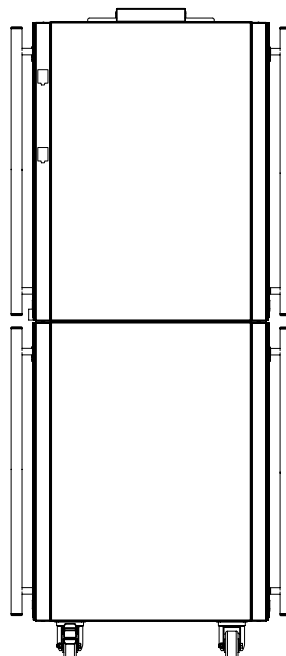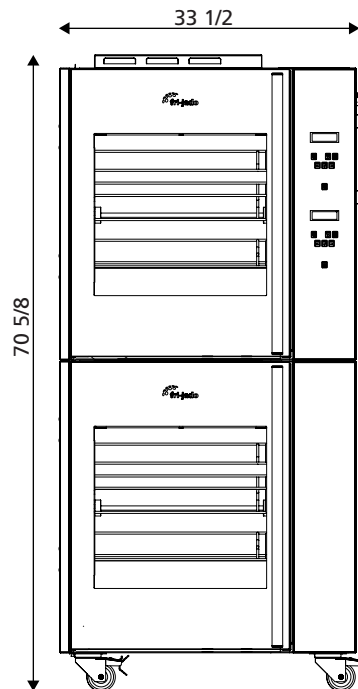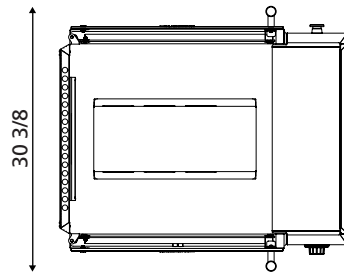

TDR 5 Programmable

- 1 Power cable, 75"
- 2 Exhaust opening
- 3 Space to the wall
- 4 Location for socket

Dimensions TDR 5

| | |
|-----------------|---------|
| Width | 33" |
| Depth | 30 3/8" |
| Height on stand | 67 7/8" |

Technical data TDR 5

| | |
|--------------|-------------|
| Net weight | 287 lbs |
| Gross weight | 353 lbs |
| Voltage | 208 V |
| Phase | 3~ |
| Frequency | 50/60 Hz |
| Power | 6.6 kW |
| Plug | NEMA 15-30P |

Dimensions TDR 5 P + 5 P

| | |
|--------|---------|
| Width | 33" |
| Depth | 30 3/8" |
| Height | 70 5/8" |

Technical data TDR 5 P + 5 P

| | |
|--------------|------------------|
| Net weight | 586 lbs |
| Gross weight | 661 lbs |
| Voltage | 208 V |
| Phase | 3~ |
| Frequency | 60 Hz |
| Power | 6.6 kW (2x) |
| Plug | NEMA 15-30P (2x) |

Specifications and technical data are subject to amendment without prior notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at www.frijado.com.



Fri-Jado Inc.
 1401 Davey Road
 Suite 100
 Woodridge IL 60517
 Toll free 877-374-5236
 Fax 630-689-1424
 e-mail us.info@frijado.com
frijado.com