

Fast and energy saving

TDR 7/8 Programmable

The Turbo Deli Rotisserie is the fastest original rotisserie in the industry! The double-loop airflow heats the entire cavity in a very efficient way, preparing your products up to 30% faster than conventional rotisseries. The TDR uses fresh air, roasting a rotisserie chicken as it is meant to be: crispy and delicious while maintaining an attractive appearance for hours.

The TDR pushes the air throughout the cavity, resulting in an improved heat transfer on the products and consequently in a reduced electricity consumption during the preparation process. Thanks to Eco Cooking the TDR saves 5% additional energy. Add to this the improved heat transfer on the products and a fast preparation process and you have yourself the most energy-efficient rotisserie with a high output.

Cook Correction corrects alterations in the cooking cycle that are due to half-loads, overloads, or products with a difference in temperature. It measures abnormalities in the temperature curve and corrects the cycle automatically, ensuring food-safety and energy-efficient cooking.



Features TDR 7/8 Programmable

Top features

- Controls with programmable settings - easy, consistent operation
- Cook Correction detects and corrects abnormalities during the cook cycle
- Eco Cooking uses residual heat during the last part of the cook cycle
- Saves up to 25% on energy use

Standard characteristics

- 8 meat fork or V-spit positions, 7 basket or rack positions
- Rotor for up to 40 chickens (2,6 lbs) per batch
- 99 programs with up to 3 cook stages per program
- USB connection for easy transfer of data and programs
- Boost functionality to add extra time
- High speed convection for even cooking
- Safety stop when opening door
- Doors on both sides
- Door handle for pass through use - Avoid cross contamination
- Double glass doors, safe to touch
- No water and drain connections needed

Accessories (sold separately)

- Meat forks
- Multi-purpose baskets
- V-spits
- Chicken racks

Optional extras (sold separately)


- Double stacked unit 7/8 P + 7/8 P
- Flexible positioning with ventless hood
- Matching stand on castors



Programmable controls



Matching stand on castors (optional)




Ventless hood (optional)





Also available: Stacked TDR 7/8 P + 7/8 P


TDR 7/8

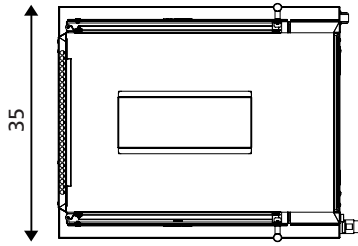



39 7/8

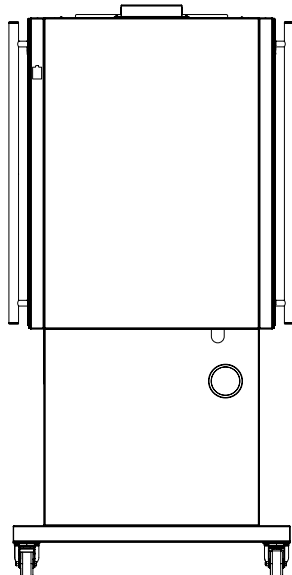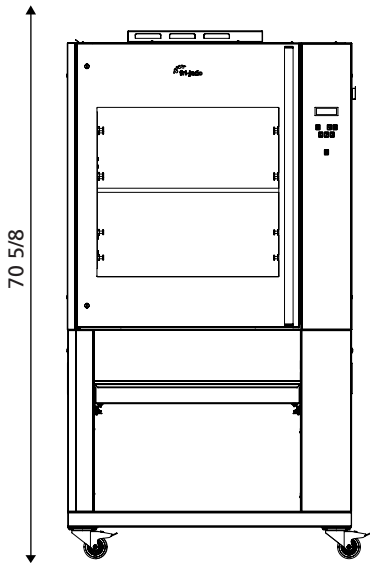

TDR 7/8+7/8



39 7/8

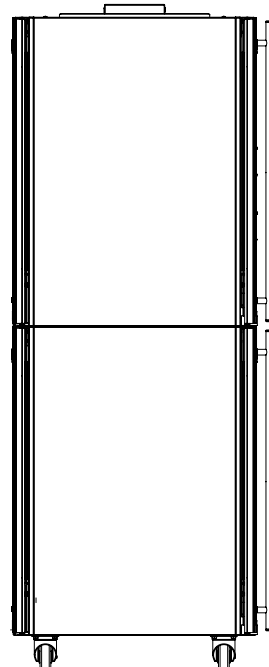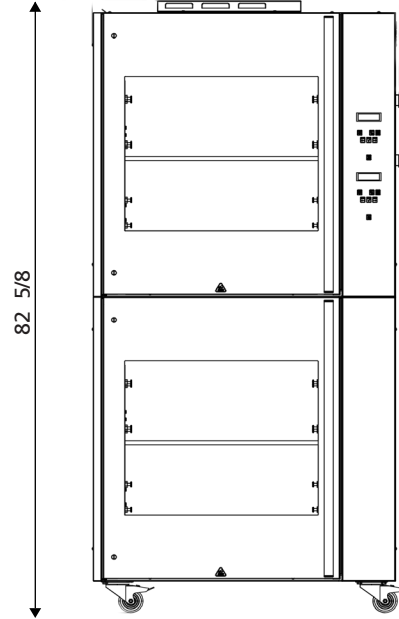

TDR 7/8 Programmable

- 1 Power cable 75"
- 2 Exhaust opening
- 3 Space to the wall
- 4 Location for socket

Dimensions TDR 7/8

Width	39 7/8"
Depth	35"
Height on stand	70 5/8"

Technical data TDR 7/8

Net weight	408 lbs
Gross weight	463 lbs
Voltage	208 V
Phase	3~
Frequency	50/60 Hz
Power	10.5 kW
Plug	NEMA 15-50P

Dimensions TDR 7/8+7/8

Width	39 7/8"
Depth	35"
Height	82 5/8"
Width on low profile castors	46 5/8"
Depth on low profile castors	35"
Height on low profile castors	79 3/8"

Technical data TDR 7/8+7/8

Net weight	827 lbs
Gross weight	959 lbs
Voltage	208 V
Phase	3~
Frequency	50/60 Hz
Power	10.5 kW (2x)
Plug	NEMA 15-50P (2x)

Specifications and technical data are subject to amendment without prior notice.

These are basic drawings. For more detailed technical information, please refer to the installation manual at www.frijado.com.

