

HEATED SELF-SERVICE DISPLAY

SPECIFICATIONS

Model : **V60 LS 5 PULSE**

Manufacturer :



PERFORMANCE

5 stainless steel heated presentation shelves.
Double technology of air flux (Static and ventilated heat).
Constant flow of air diffused in the cabinet all around packed hot products.
Each shelf is heated and ventilated.
The unit is maintained at the legal temperature by a curtain of hot air in the front.
Regulation by thermostat (front display facing customers).
Quartz lighting and tempered glass protection.

ERGONOMIC

Retaining tempered glass hulls on each shelf.
4 casters including 2 with brakes.

A BEAUTIFUL DESIGN

Lateral left and right windows for a panoramic view.
Visibility on three sides.

SAFETY

Tempered glass protectionm.



POWER SUPPLY

- Standard: 220V Triphase
- 20 Amps
- 4500 Watts

HEATED SELF-SERVICE DISPLAY


SPECIFICATIONS

Model : **V 60 LS 5 PULSE**


Manufacturer :



SIDE VIEW

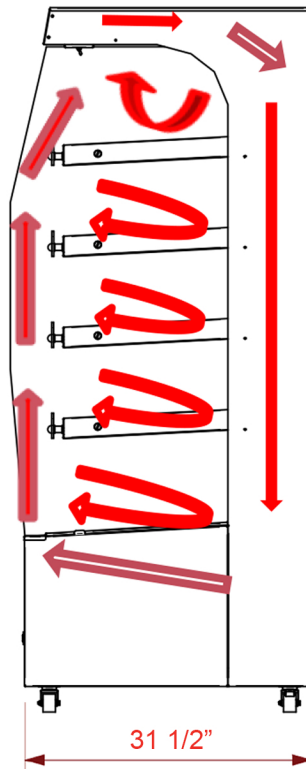

FRONT VIEW

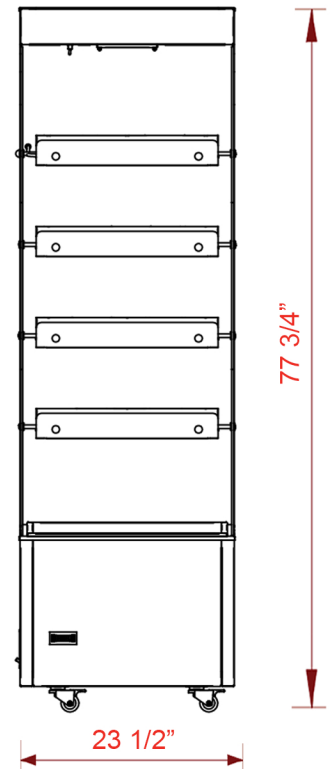

References	Width	Depth	Height	Voltage	Plug	Power
V 60 LS 5 PULSE	23 1/2"	31 1/2"	77 3/4"	222 Triphase	20 A	4400 W